

## Acting Manager:

Dr. Mehdi Akhavan Bahabadi  
Assistant Professor  
National Center for Cyber Space

## Editor - In - Chief:

Dr. Kambiz Badie  
Associate Professor  
ICT Research Institute

## Executive Manager:

Dr. Ahmad Khadem-Zadeh  
Associate Professor  
ICT Research Institute

## Associate Editor (CT Section):

Dr. Reza Faraji-Dana  
Professor  
University of Tehran

## Associate Editor (Network Section):

Dr. S. Majid Noorhoseini  
Assistant Professor  
Amirkabir University of Technology

## Editorial Board:

Dr. Abdolali Abdipour  
Professor  
Amirkabir University of Technology

Dr. Hassan Aghaeinia  
Associate Professor  
Amirkabir University of Technology

Dr. Vahid Ahmadi  
Professor  
Tarbiat Modares University

Dr. Abbas Asosheh  
Assistant Professor  
Tarbiat Modares University

Dr. Karim Faez  
Professor  
Amirkabir University of Technology

Dr. Hossein Gharaie  
Assistant Professor  
ICT Research Institute

Dr. Farrokh Hodjat Kashani  
Professor  
Iran University of Science & Technology

Dr. Ehsanollah Kabir  
Professor  
Tarbiat Modares University

Dr. Mahmoud Kamarei

Professor  
University of Tehran

Dr. Manouchehr Kamyab  
Associate Professor  
K. N. Toosi University of Technology

Dr. Ghasem Mirjalili  
Associate Professor  
Yazd University

Dr. Kamal Mohamed-pour  
Professor  
K.N. Toosi University of Technology

Dr. Ali Moini  
Associate Professor  
University of Tehran

Dr. Ali Movaghar Rahimabadi  
Professor  
Sharif University of Technology

Dr. Keyvan Navi  
Associate Professor  
Shahid Beheshti University

Dr. Jalil Rashed Mohasel  
Professor  
University of Tehran

Dr. Babak Sadeghian  
Associate Professor  
Amirkabir University of Technology

Dr. S. Mostafa Safavi Hemami  
Associate Professor  
Amirkabir University of Technology

Dr. Ahmad Salah  
Associate Professor  
ICT Research Institute

Dr. Hamid Soltanian-Zadeh  
Professor  
University of Tehran

Dr. Fattaneh Teghiyareh  
Assistant Professor  
University of Tehran

Dr. Mohammad Teshnehlav  
Associate Professor  
K. N. Toosi University of Technology

Dr. Mohammad Hossein Yaghmaee Moghaddam  
Associate Professor  
Ferdowsi University of Mashhad

Dr. Alireza Yari  
Assistant Professor  
ICT Research Institute

## Secretariat Organizer:

Taha Sarhangi

## Executive Assistants:

Valiollah Ghorbani  
Shima Tavasoli



## Topics of Interest

### Information Technology

Information Systems

IT Applications & Services

IT Platforms: Software & Hardware Technology

IT Strategies & Frameworks

### Communication Technology

Communication Devices

Communication Theory

Mobile Communications

Optical Communications

Satellite Communications

Signal / Image / Video Processing

### Network Technology

Computer & Communication Networks

Wireless Networks

Network Management

Network Security

NGN Technology

Security Management

IJICTR

This Page intentionally left blank.

# Compact Band-Pass and Band-Reject Microwave Filters Using Partial H-Plane Waveguide and Dielectric Layers

A. Ghajar

Department of Electrical Engineering  
University of Guilan  
Rasht, Iran  
alighajar1990@gmail.com

H. Ghorbaninejad-Foumani

Department of Electrical Engineering  
University of Guilan  
Rasht, Iran  
ghorbaninejad@guilan.ac.ir

Received: May 14, 2014-Accepted: December 8, 2014

**Abstract**— In this paper, microwave filters were designed using dielectric layers, which were transversely located inside a partial H-plane waveguide. The proposed structure can be used to design microwave filters with arbitrary frequency response including band-pass or band-reject filters. Its longitude was reduced by about 31% compared with conventional partial H-plane band-pass filters. Since the cross-section of partial H-plane waveguide, in a determined frequency range, is one quarter of the conventional waveguide, then the proposed filter has the cross-section of one quarter compared with the counterpart E-plane waveguide filter. Besides compactness, it is easy to fabricate, cheap, mass producible, mechanically stable, and capable of sustaining high microwave power and has very good adjustment to any arbitrary ideal filter. The proposed partial H-plane band-pass filter and its performance in terms of compactness and adjustment to any arbitrary ideal filter were verified by designing and simulating three filters.

**Keywords**-Partial H-plane waveguide; Partial H-plane filter; Band-pass E-plane filter; Compact microwave filter; Band-pass microwave filter.

## I. INTRODUCTION

Microwave filters have wide applications in microwave and communication systems. Some kinds of these filters include micro-strip filters [1, 2], substrate integrated waveguides (SIWs) [3], dielectric resonator (DR) filters [4, 5], waveguide filters filled with dielectric layers [6, 7], and waveguide filters filled with dielectric and magnetic layers [8] which are multi-layer longitudinally inhomogeneous waveguide (LIW) [9, 10]. Now, restriction in terms of size and weight of microwave components is a momentous consideration. In fact, in many applications, the total size of filter is reduced. There are always the challenges of size

reduction and many methods have been proposed for compact microwave components. Since many microwave filters contain transmission line sections, some efforts have been made to reduce the length of transmission lines such as using DGS [11], fractal line [12], stepped stubs [13], and non-uniform transmission line [14]. Cut off frequency has an inverse relation to the dimension of waveguide so that increasing cut off frequency leads to size reduction [15]. Thus, some changes should be made to design a filter with suitable size, which works at lower frequency. Three types of band-pass filters using a new type of compact waveguide, namely partial H-plane waveguide, have been presented [16]. It has been shown that the cross-



section of partial H-plane waveguide is one quarter of that of the conventional rectangular waveguide [17].

In this paper, using partial H-plane waveguide, in which several dielectric layers are inserted, a new type of compact band-pass microwave filter was proposed. The proposed structure did not employ inductive elements such as diaphragm, rods, irises, and posts; so, it was easy to fabricate. Besides, because of using partial H-plane waveguide in the proposed filter, its cross-section was one quarter of that of the conventional one, while their frequency responses were the same. Another trait of the introduced filter was replacing  $\lambda/2$  waveguide sections as resonators with dielectric layers, which made it possible to considerably reduce the total length of the filter. Thus, the proposed filter had both advantages including reduced cross-sectional size and longitudinal length. To design the proposed filter, permittivity and thickness of dielectric layers had to be obtained. Performance of the proposed filter was verified using some theoretical and simulation examples.

## II. ANALYSIS OF THE PROPOSED FILTER

Fig. 1 shows the partial H-plane waveguide. Partial H-plane waveguide is a conventional rectangular waveguide in which a partial metal vane is inserted in the H-plane. The cross-section of partial H-plane waveguide has one quarter cross-section of the conventional waveguide, while the dispersion characteristics of the first two dominant modes are the same [17]. Fig. 2 demonstrates the proposed dielectric filled partial H-plane filter which was made of  $K$  dielectric layers that were transversely inserted in a partial H-plane waveguide. Partial H-plane cross-sections were  $a$  and  $b$  and the vane width and thickness of partial H-plane vane were assumed to be  $d$  and zero, respectively. The relative electric permittivity and thickness of dielectric layers were  $\epsilon_{r,k}$  and  $d_k$ , respectively, for  $k=1, 2, \dots, K$ . The proposed structure did not vary in the transverse direction; thus, only dominant  $TE_{10}$  mode was propagated in the positive  $z$ -direction. The frequency domain analysis of multi-layer longitudinal inhomogeneous waveguides can be used to analyze the proposed structure. Based on this method, the chain parameter matrix of total structure can be written as follows:

$$\begin{bmatrix} A & B \\ C & D \end{bmatrix} = \prod_{k=1}^K \mathbf{T}_k \quad (1)$$

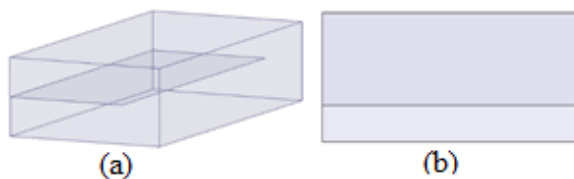


Fig.1. Partial H-plane waveguide. (a) Side view. (b) Top view.

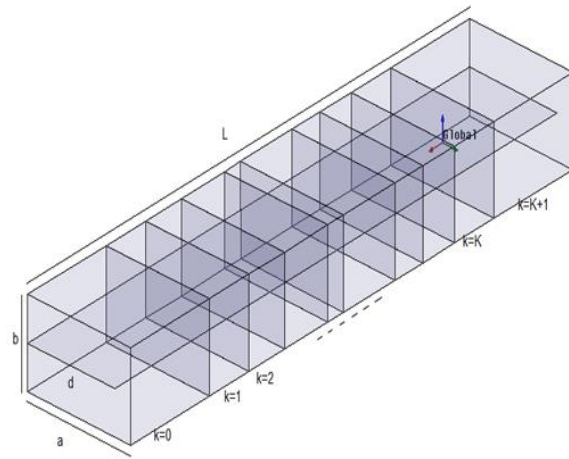


Fig. 2. The proposed dielectric filled partial H-plane filter.

where  $\mathbf{T}_k$  is chain parameter of the  $k$ -th dielectric layer and can be written as follows:

$$\mathbf{T}_k = \begin{bmatrix} \cos(\beta_k d_k) & jZ_k \sin(\beta_k d_k) \\ j\sin(\beta_k d_k) / Z_k & \cos(\beta_k d_k) \end{bmatrix} \quad (2)$$

In (2),  $\beta_k$  and  $Z_k$  are propagation coefficient constants and characteristic impedance, respectively, as follows:

$$\beta_k = k_0 \sqrt{\epsilon_{r,k} - (f_c/f)^2} \quad (3)$$

$$Z_k = \eta_0 / \sqrt{\epsilon_{r,k} - (f_c/f)^2} \quad (4)$$

where  $k_0 = 2\pi f / c$  is the wave number of electromagnetic wave and  $\eta_0 = \sqrt{\mu_0 / \epsilon_0}$  is the intrinsic impedance of wave both in free space. For finding scattering parameters, conversion of T-parameter into S-parameter can be used:

$$S_{11} = \frac{AZ_0 + B - CZ_0^2 - DZ_0}{AZ_0 + B + CZ_0^2 + DZ_0} \quad (5)$$

$$S_{12} = S_{21} = \frac{2Z_0}{AZ_0 + B + CZ_0^2 + DZ_0} \quad (6)$$

$$S_{22} = \frac{-AZ_0 + B - CZ_0^2 + DZ_0}{AZ_0 + B + CZ_0^2 + DZ_0} \quad (7)$$

where  $Z_0$  is the characteristic impedance of partial H-plane waveguide at the center frequency given by:

$$Z_0 = \eta_0 / \sqrt{1 - (f_c/f)^2} \quad (8)$$

## III. DESIGN PROCEDURE

To design the proposed filter, values of the relative permittivity of dielectric layers and their thicknesses had to be obtained so that a predefined frequency characteristic could be achieved in a frequency domain. The designed method was based on the optimization of a suitable fitness function along with limiting conditions for easy fabrication or implementation consideration. On the other hand, the amplitude of  $S_{21}$  parameter of the proposed structure was adjusted to the transfer function of arbitrary

desired filter in a frequency range. That frequency range was indicated by some frequency samples with equal distance. So, the following fitness function can be defined for M discrete frequencies  $f_1, f_2, \dots, f_M$  all in the frequency domain:

$$fitness = \sqrt{\frac{1}{M} \sum_{m=1}^M \|s_{21}(f_m) - |H(f_m)|\|^2}. \quad (9)$$

In (9),  $|s_{21}(f_m)|$  is the absolute value of the proposed scattering parameter and  $|H(f_m)|$  is the absolute value of any desired transfer function both at frequency  $f_m$ . Here, the fitness function is defined based on the mean square error, by which the amplitude of desired ideal filter is related to the amplitude of  $S_{21}$  parameter of the proposed structure; so, optimum values including dielectric layer lengths and their relative electric permittivity will be obtained.

The number of dielectric layers inserted in the partial H-plane waveguide was arbitrarily chosen; if the precision of transfer function of the designed filter were not acceptable, the number of layers must be increased.

Moreover, some restrictions could be dispensed on dielectric lengths and their permittivity for easy fabrication and implementation considerations. These constrained conditions are as follows:

$$d_k \geq d_{\min} \quad (10)$$

$$1 \leq \epsilon_{r,k} \leq \epsilon_{r,\max} \quad (11)$$

for  $k=1, 2, \dots, K$ .

#### IV. EXAMPLE AND RESULTS

**Example I:** In this section and in the first example, a third-order Chebyshev band-pass filter with the center frequency of 5 GHz, fractional bandwidth (FBW) of 5%, and equal ripples of 0.01dB in passband using partial H-plane waveguide was designed. Cross-sectional dimensions of this partial H-plane waveguide were  $a=23.8$  mm and  $b=12$  mm and width of the metal vane was  $d=20.2$  mm. Also, the thickness of metal vane was assumed to be zero. The number of dielectric layers inserted in the partial H-plane waveguide was  $K=15$ . In [17], the cutoff frequency of  $f_c = 3.35$  GHz for the dominant mode was calculated by both analytic and numerical methods, which was equivalent to the dominant cut-off frequency of the conventional waveguide with the dimension of  $a=47.55$  mm and  $b=22.15$  mm. Then, the value of characteristic impedance was  $Z_0=485.9$  (ohm). Thus, it is obvious that this kind of filter possessed the cross-section of one quarter compared to the counterpart E-plane waveguide filter.

Optimization constrained conditions were set so that dielectric layer thicknesses were greater than or equal to  $d_{\min}=0.4$  mm and maximum relative electric permittivity was  $\epsilon_{r,\max}=13$ . The frequency range of optimization was 4.5-5.5 GHz,  $f_1 = 4.5$  GHz, and  $f_M = 5.5$  GHz and the number of equally spaced frequency samples was  $M=51$ . Table I shows optimum

relative permittivity and thickness of dielectric layers which were obtained using optimization process. Fig. 3 illustrates the optimum relative permittivity of dielectric layers. Also, Fig. 4 demonstrates optimum thickness values of dielectric layers.

Fig. 5 compares the transmission response of the band-pass filter designed with MATLAB and simulated by HFSS and that of the ideal one. It is obvious that there was an excellent agreement between three curves in the frequency range.

It can be deduced from the optimum values of Table I that the proposed filter had the length of  $L=100$  mm; its length can be compared with that of three compact partial H-plane waveguide filters, as presented in [18]; thus, it can be concluded that this filter was 31% shorter than the most compact one among those filters.

TABLE I. Optimum parameter of example I of the proposed filter.

Part No	0, 16	1	2	3	4	5	6	7
L (mm)	20	3.8	14.2	6.4	7	4.1	10.3	4.64
$\epsilon_r$	1	11	13	1	13	1	13	1

Part No	8	9	10	11	12	13	14	15
L (mm)	7.0	5.6	8.95	0.72	9.51	5.7	5.5	6.52
$\epsilon_r$	13	1	13	1.02	13	1	13	4.74

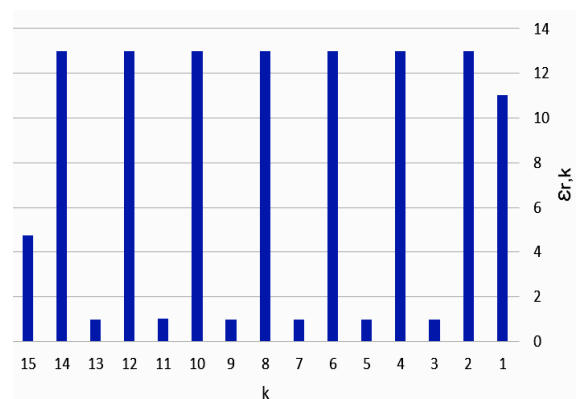


Fig. 3. Optimum relative permittivity of dielectric layers for example I.

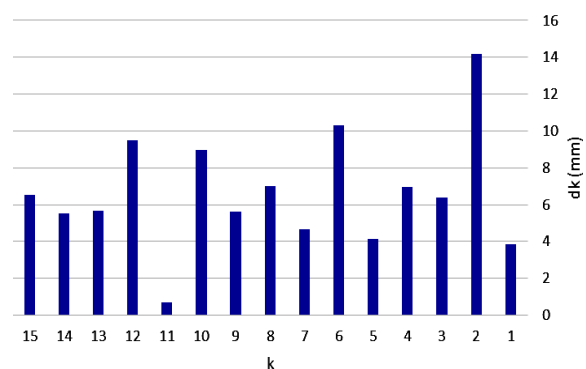


Fig. 4. Optimum thickness values of dielectric layers for example I.



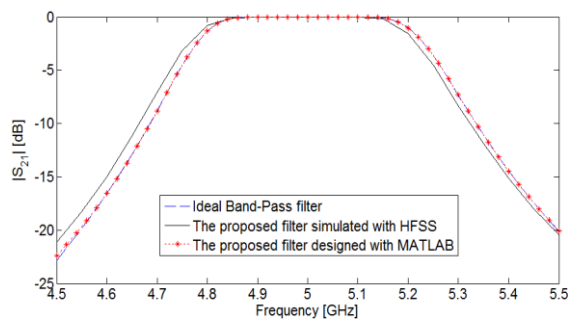


Fig. 5. Transmission response of band-pass filter of example I designed with MATLAB and simulated by HFSS and that of the ideal one versus frequency.

**Example II:** In this section and in the second example, the same filter as in example I with new restriction on the maximum value of relative electric permittivity of dielectric layers was designed. Here, it was assumed that  $\epsilon_{r,max} = 10$  and all other specifications were the same as the former example. Table II shows optimum relative permittivity and thickness of dielectric layers of example II. Fig. 6 illustrates the optimum relative permittivity of dielectric layers. Also, Fig. 7 demonstrates optimum thickness values of dielectric layers.

Fig. 8 compares the transmission response of the band-pass filter designed with MATLAB and simulated by HFSS and that of the ideal one.

The length of the filter was  $L=100$  mm. It is obvious that, with a limitation on maximum dielectric permittivity, the agreement between the desired and optimum curves was degraded. Also, as the number of dielectric layers,  $K$ , increased, the adjustment precision increased.

TABLE II. Optimum parameter for the proposed filter in example II.

Part NO	0, 15	1	2	3	4	5	6
L (mm)	20	20.3	3.96	7.83	6.08	8.18	2.79
$\epsilon_r$	1	10	2.94	10	1	10	4.64

Part NO	7	8	9	10	11	12	13	14
L (mm)	11.5	5.06	7.84	5.22	9.9	0.59	7.4	3.34
$\epsilon_r$	10	1.48	10	1.29	10	3.53	10	8.3

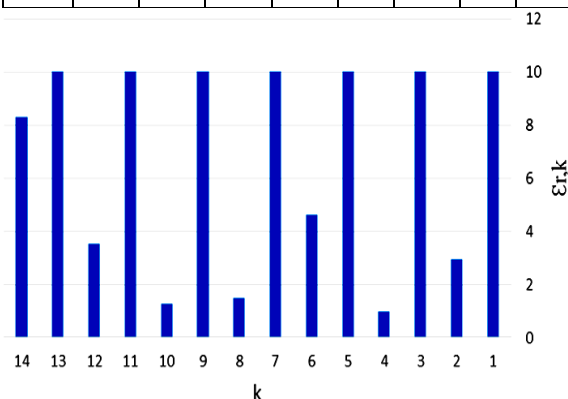


Fig. 6. The optimum relative permittivity of dielectric layers for example II.

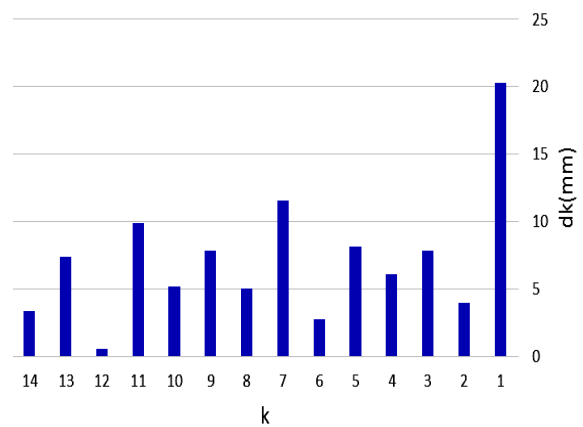


Fig. 7. Optimum thickness values of dielectric layers for example II.

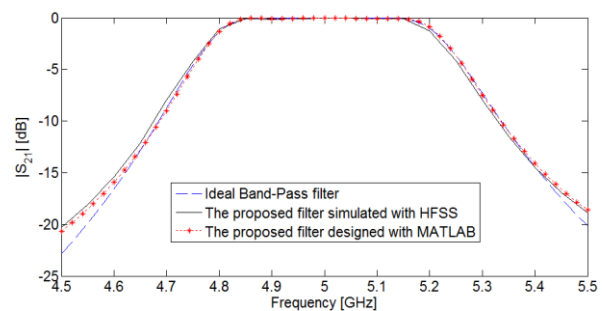


Fig. 8. Transmission response of band-pass filter of example II designed with MATLAB and simulated by HFSS and that of the ideal one versus frequency.

**Example III:** In this section and in the third example, a third-order Chebyshev band-reject filter with the center frequency of 5 GHz, fractional bandwidth (FBW) of 10% and equal ripples of 1 dB was designed in passband using partial H-plane waveguide. Here, the length of filter was  $L=150$  mm. Also, it was assumed that  $\epsilon_{r,max} = 15$  and all other specifications of the structure were the same as the former example. The number of dielectric layers inserted in the partial H-plane waveguide was  $K=17$ .

Frequency range of optimization was 4-6 GHz and the number of equally spaced frequency samples was  $M=67$ .

Table III shows optimum relative permittivity and thickness of dielectric layers of example III. Fig. 9 illustrates the optimum relative permittivity of dielectric layers. Also, Fig. 10 represents optimum thickness values of dielectric layers.

Fig. 11 compares the transmission response of the band-reject filter designed with MATLAB and simulated by HFSS and that of the ideal one. As demonstrates, there was about 3 dB ripple in the passband of transmission response, which was negligible in some applications and had a sort of good stopband.

TABLE III. Optimum parameter for the proposed filter in example III.

Part No	0, 18	1	2	3	4	5
L(mm)	20	9.5	2.2	9.95	4.19	10.27
$\epsilon_r$	1	15	1	15	1	15

Part No	6	7	8	9	10	11
L(mm)	1.03	18.54	3.72	8.96	17.2	2.83
$\epsilon_r$	2.39	15	1	15	2.99	1

Part No	12	13	14	15	16	17
L(mm)	2.84	20.3	9.02	4.22	8.92	16.29
$\epsilon_r$	15	2.95	15	1	15	8.03

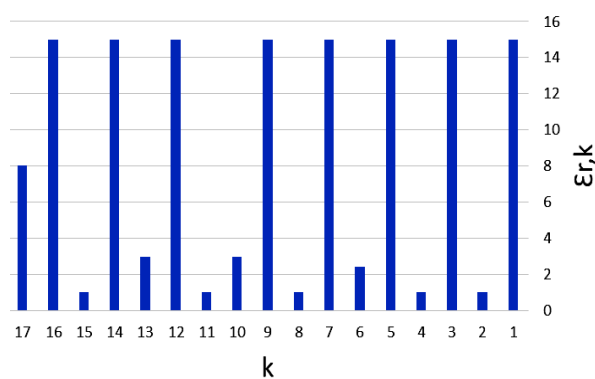


Fig. 9. The optimum relative permittivity of dielectric layers for example III.

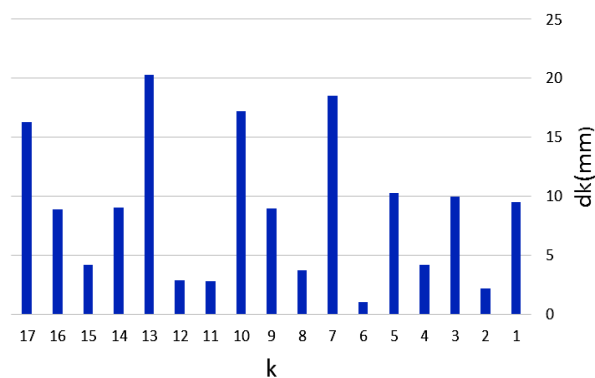


Fig. 10. Optimum thickness values of dielectric layers for example III.

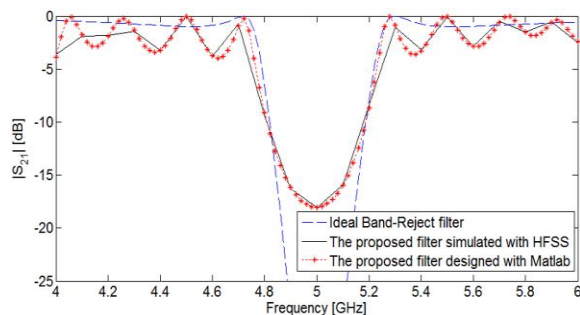


Fig. 11. Transmission response of band-reject filter of example III designed with MATLAB and simulated by HFSS and that of the ideal one versus frequency.

## V. CONCLUSION

In this article, a new kind of compact microwave filter was proposed. The proposed compact filter was made of some dielectric layers which were transversely inserted in a partial H-plane waveguide. Because of using partial H-plane waveguide, this filter had one quarter cross-section compared with the conventional waveguide filter for the same frequency response. Moreover, it had considerably shortened total longitudinal length compared with that of the existing partial H-plane waveguide filters. Some other advantages of the proposed filter included its easy fabrication since there was no requirement on the inductive elements in its structure, high mechanical stability, ability of being used in high microwave power, and ability of designing a arbitrary kind of filters. Also, it was possible to arbitrarily close frequency response of the proposed filter to that of the desired one by increasing the number of dielectric layers. Usefulness and performance of the proposed structure were confirmed and verified by designing and simulating some filters.

## REFERENCES

- [1] Matthaei, G. L., L. Young, and E. M. T. Jones, *Microwave Filters, Impedance-Matching Networks and Coupling Structures*, Artech House, Dedham, Mass., 1980.
- [2] Levy, R., R. V. Snyder, and G. Mattaei, "Design of microwave filters," *IEEE Trans. Microwave Theory Tech.*, Vol. 50, pp. 783-793, 2002.
- [3] Sotoodeh, Z., B. Beglarbegian, F. H. Kashani, and H. Ameri, "A novel band pass waveguide filter structure on SIW technology," *Progress In Electromagnetics Research Letters*, Vol. 2, pp. 141-148, 2008.
- [4] Kobaysh, Y. and M. Mihegishi, "A band pass filter using high-Q dielectric ring resonators," *IEEE-MTT-S Digest*, 1987.
- [5] Saliminejad, R. and M. R. Ghafouri Fard, "A novel and accurate method for designing dielectric resonator filter," *Progress In Electromagnetics Research B*, Vol. 8, pp. 293-306, 2008.
- [6] Ghorbaninejad, H. and M. Khalaj-Amirhosseini, "Compact bandpass filters utilizing dielectric filled waveguides," *Progress In Electromagnetics Research B*, Vol. 7, pp. 105-115, 2008.
- [7] Khalaj-Amirhosseini, M., "Microwave filters using waveguides filled by multi-layer dielectric," *Progress In Electromagnetics Research*, PIER 66, pp. 105-110, 2006.
- [8] M. Khalaj-Amirhosseini and H. Ghorbaninejad, "Arbitrary microwave filters using waveguides filled by dielectric and magnetic layers," *Progress in Electromagnetics Research Symposium Proceedings*, Xi'an, China, pp. 22-26, March 2010.
- [9] Khalaj-Amirhosseini, M., "Analysis of longitudinally inhomogeneous waveguides using finite difference method," *International Conference on Information and Communication Technologies: From Theory to Applications*, pp. 799-800, Damascus, Syria, April, 2006.
- [10] Khalaj-Amirhosseini, M., "Analysis of longitudinally inhomogeneous waveguides using the fourier series expansion," *Journal of Electromagnetic Waves and Applications*, Vol. 20, No. 10, pp. 1299-1310, 2006.
- [11] Dwari, S. and S. Sanyal, "Size reduction and harmonic suppression of micro strip branch-line coupler using defected ground structure," *Microwave and Optical Technology Letters*, Vol. 48, pp. 1966-1969, 2006.
- [12] Chen, W. L. and G. M. Wang, "Design of novel miniaturized fractal-shaped branch-line couplers," *Microwave and Optical Technology Letters*, Vol. 50, pp. 1198-1201, May 2008.





- [13] Sakagami, I., M. Haga, and T. Munehiro, "Reduced branch line coupler using eight two-step stubs," *IEE Proc. Microw. Antennas Propag.*, Vol. 146, No. 6, pp. 455-460, 1999.
- [14] Khalaj-Amirhosseini, M., "Non uniform transmission lines as compact uniform transmission lines," *Progress In Electromagnetics Research C*, Vol. 4, pp. 205-211, 2008.
- [15] Collin, Foundations for microwave engineering, IEEE press, pp. 184-185, 1992.
- [16] Dong-Won Kim and Jeong-Hae Lee, "Partial H-Plane Filters With Partially Inserted H-Plane Metal Vane," *IEEE Microwave and wireless component letters*, Vol. 15, No. 5, May 2005.
- [17] Dong-Won Kim and Jeong-Hae Lee, "A partial H-plane waveguide as a new type of compact waveguide," *Microwave Opt Technol Lett* 43, pp. 426-428, Wiley Inter Science, 2004.
- [18] Dong-Won Kim, Dong-Jin Kim, and Jeong-Hae Lee, "Compact partial H-plane filters," *IEEE transactions on microwave theory and techniques*, Vol. 54, No. 11, pp. 3923-3930, November 2006.



**A. Ghajar** was born in Qazvin, Iran. He received his B. Sc. degree from Imam Khomeini International University (IKIU) in 2012 in Telecommunication Engineering. Now he is M. Sc. student of university of guilan in Telecommunication Engineering. His scientific field of interest is microwave

component designing including, microwave filters and frequency selective surfaces.



**H. Ghorbaninejad-Foumani** was born in Guilan, Iran. He received his B. Sc. degree from university of guilan in 2003 and his M. Sc. and Ph. D. degrees from Iran University of Science and Technology (IUST) in 2005 and 2010 respectively, all in Telecommunication Engineering.

He is currently assistant professor at department of electrical engineering of university of guilan. His scientific fields of interest are electromagnetic problems including microwave and spatial filter design, compact microwave devices and finding Green's function of microwave structures.