International Journal of Information & Communication Technology Research

International Journal of Information



Acting Manager:

Dr. Mehdi Akhavan Bahabadi

Assistant Professor

National Center for Cyber Space

Editor - in - Chief:

Dr. Kambiz Badie

Associate Professor

ICT Research Institute

Executive Manager:

Dr. Ahmad Khadem-Zadeh

Associate Professor

ICT Research Institute

Associate Editor (CT Section):

Dr. Reza Faraji-Dana

Professor

University of Tehran

Associate Editor (Network Section):

Dr. S. Majid Noorhoseini

Assistant Professor

Amirkabir University of Technology

Editorial Board:

Dr. Abdolali Abdipour

Professor

Amirkabir University of Technology

Dr. Hassan Aghaeinia

Associate Professor

Amirkabir University of Technology

Dr. Vahid Ahmadi

Professor

Tarbiat Modares University

Dr. Abbas Asosheh

Assistant Professer

Tarbiat Modares University

Dr. Karim Faez

Professor

Amirkabir University of Technology

Dr. Hossein Gharaie

Assistant Professor

ICT Research Institute

Dr. Farrokh Hodjat Kashani

Iran University of Science & Technology

Dr. Ehsanollah Kabir

Professor

Tarbiat Modaress University

Dr. Mahmoud Kamarei

Professor

University of Tehran

Dr. Manouchehr Kamyab

Associate Professor

K. N. Toosi University of Technology

Dr. Ghasem Mirjalili

Associate Professor

Yazd University

Dr. Kamal Mohamed-pour

K.N. Toosi University of Technology

Dr. Ali Moini

Associate Professor

University of Tehran

Dr. Ali Movaghar Rahimabadi

Sharif University of Technology

Dr Keyvan Navi

Associate Professor

Shahid Beheshti University

Dr. Jalil Rashed Mohasel

Professor

University of Tehran

Dr. Babak Sadeghian

Associate Professor

Amirkabir University of Technology

Dr. S. Mostafa Safavi Hemami

Associate Professor

Amirkabir University of Technology

Dr. Ahmad Salahi

Associate Professor

ICT Research Institute

Dr. Hamid Soltanian-Zadeh

Professor

University of Tehran

Dr. Fattaneh Teghiyareh

Assistant Professor

University of Tehran

Dr. Mohammad Teshnehlab

Associate Professor

K. N. Toosi University of Technology

Dr. Mohammad Hossein Yaghmaee Moghaddam

Associate Professor

Ferdowsi University of Mashhad

Dr. Alireza Yari

Assistant Professor

ICT Research Institute

Secretariat Organizer:

Taha Sarhangi



Valiollah Ghorbani

Shima Tavasoli



IJICTR

International Journal of Information &

Communication Technology Research



Volume 6- Number 3- Summer 2014

Topics of Interest

Information Technology

Information Systems

IT Applications & Services

IT Platforms: Software & Hardware Technology

IT Strategies & Frameworks

Communication Technology

Communication Devices

Communication Theory

Mobile Communications

Optical Communications

Satellite Communications

Signal / Image / Video Processing

Network Technology

Computer & Communication Networks

Wireless Networks

Network Management

Network Security

NGN Technology

Security Management



International Journal of Information



Volume 6- Number 3-Summer 2014

IJICTR

This Page intentionally left blank.



Volume 6- Number 3- Summer 2014 (1-6)

Design Investigation of a Modified HMSIW Leaky Wave Antenna

Seyed Ali. Razavi Department of Electrical Engineering Ferdowsi university of Mashhad Mashhad, Iran. alirazavi_parizi@yahoo.com

Mohammad H. Neshati Department of Electrical Engineering Ferdowsi university of Mashhad Mashhad, Iran. neshat@um.ac.ir

Received: January 1, 2013-Accepted: August 3, 2014

Abstract— In this paper, a new leaky wave antenna (LWA) is introduced. The proposed antenna radiates through a dielectric aperture created by half mode substrate integrated waveguide (HMSIW) technique. A sample antenna is designed and simulated and its radiation characteristics are investigated. It is illustrated that half conical radiation pattern is provided by the proposed antenna. The designed antenna is also fabricated and its radiation properties are measured. Results show that the proposed antenna has the advantages of wide bandwidth, enhanced scanning angle and high gain in addition to low profile, low fabrication cost, low weight. Radiation patterns of antenna at different frequencies are theoretically calculated and compared with simulated ones. Good agreement between simulated and calculated results proves the validity of the theory presented for the calculation of radiation patterns. Moreover, its common features including high directivity and beam steering capability which make it suitable for millimeter-wave applications.

Keywords- leaky wave antenna; beam steering; half mode substrate integrated waveguide (HMSIW)

I. INTRODUCTION

Leaky Wave Antennas (LWAs) in planar technology offer a simple solution to obtain a lowcost and easy-fed directive radiation patterns from a low-profile single layer circuit. The first LWA using microstrip technology was introduced in [1], and later it was studied in detail [2]. Recently, a half-width microstrip (HWM) LWA was proposed in [3]. This kind of LWA provides an easier feeding method than the full-width microstrip LWA, since it can directly operates by its fundamental EH mode. In [4] a LWA is designed based on microstrip structure. But, due to conductor loss, its radiation efficiency is low.

Recently Substrate Integrated Waveguide (SIW) technology is widely used as a low cost implementation of different planar microwave components and antenna structures [5], since it provides advantages such as high Q-factor, low conductor loss and easy integration with planar circuits. In [6] the leakage of electromagnetic fields is obtained by increasing the distance between each two vias of the SIW and the LWA radiates through the side wall of the structure. In [7] the LWA radiates through a long slot etched on the broad wall of the SIW. In [8-9] LWAs are designed and investigated based on the composite left/right handed SIW concept. In these designs the leaky wave is radiated through inter-digital slots etched on the broad wall of SIW. The proposed antennas in [8-9] have the ability of beam steering from backfire to end-fire including the broadside direction. In [10] the leakage power is radiated through a series of inclined slots on the broad wall of SIW. The proposed antenna in [10] is able to produce different polarizations depending on which



port of the antenna is excited. In [11] the leaky wave is radiated through a periodic set of transverse slots on the broad wall of the SIW. In [12] half mode substrate integrated waveguide (HMSIW) technique is used to design a LWA. In this structure, a long SIW is cut at its symmetrical plane and the leaky wave is radiated through the open side of the HMSIW. A conical radiation pattern is provided by the proposed antenna.

In this paper HMSIW technique is used to design and investigate a LWA which radiates through a dielectric aperture of the structure. The proposed antenna is the modified form of the presented antenna in [12]. Results show that for the proposed antenna, radiation characteristics including impedance bandwidth, scanning angle and antenna gain are significantly improved while its 3D radiation pattern is halved. Furthermore, the theory of operation of the LWA is discused and analytical calculation of radiation patterns is presented. Radiation patterns of antenna at different frequencies are calculated and compared with those obtained by simulation and measurement. It is shown that good agreement between different results is observed.

II. THEORY OF OPERATION

When the dominant mode propagates in a SIW, the maximum value of E-field exists at the vertical center plane along the transmission direction. In addition, because of the large width to height ratio (WHR) of the SIW structure, the normal magnetic field is zero at this plane. As a result, the symmetrical plane of the structure can be considered as a magnetic wall. Based on this theory, the SIW structure can be bisected into two halves along the magnetic wall. Each half is called Half Mode SIW (HMSIW) and nearly supports half of the original field distribution. Furthermore, since the WHR is large, the leakage from the magnetic wall is negligible and the total power almost remains within the structure. So, a HMSIW provides electromagnetic characteristics of the original SIW, while its size is reduced by nearly 50%. The reduction of size in HMSIW may lead to lower conductor and dielectric loss in compare with the SIW. The dominant mode field distributions of the SIW and HMSIW are illustrated in Fig. 1.

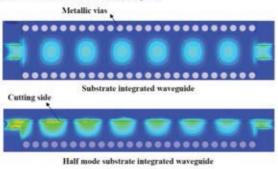


Fig. 1 Field distribution of dominant mode in SIW and HMSIW structures

III. ANTENNA CONFIGURATION AND DESIGN

Fig. 2 shows the proposed antenna configuration and its geometrical parameters. The parameters d, p, W_I , d_I and W_{50} are via diameter, via period, HMSIW width, dielectric aperture width and 50 Ω microstrip line width respectively. In order to match the input feed line to the HMSIW structure, the width of feed line is halved which is denoted by $W_{50}/2$. A tapered mirostrip line with length of L_T and end width of W_T is used to improve impedance matching condition. The values of L_T and W_T are adjusted for the best return loss. The antenna is terminated by a 50 Ω matching load.

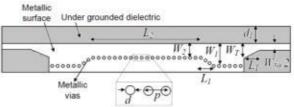


Fig. 2 Configuration of the proposed LWA antenna

The key parameter which determines the frequency range at which the effective leakage and the return loss are favorable, is the width of half mode wave guide at the leakage part of antenna denoted by W_2 [12]. In fact, if W_2 is selected equal to W_I , the leakage is decreased so that it can be neglected as discussed in part II. In order to obtain good power leakage and better return loss in the desired frequency range, W_2 should be less than W_I and its value should be tuned by numerical investigation.

To study the effect of W_2 on reflection coefficient and insertion loss, a parametric study is carried out using HFSS software. Results for S_{11} and S_{12} are illustrated in Fig. 3. It can be seen that the frequency band in which the effective leakage is taken place, is greatly affected by W_2 . To improve S_{11} , a section of HMSIW with tapered width from W_1 to W_2 is adopted. The length of tapered part L_I is adjusted numerically by software in order to get the desired return loss.

Also the effect of antenna aperture length, L_2 on beamwidth and insertion loss of the proposed LWA was studied numerically. It can show that higher radiation efficiency and narrower beamwidth could be obtained by increasing the antenna length L_2 [12]. This fact is clearly illustrated in Fig 4(a) and Fig. 4(b). In Fig. 4(a), simulated H-plane radiation pattern is shown for different values of antenna length. It can be observed that the beamwidth decreases as L_2 increase. The percentage of radiated leakage power based on the definition in equation (1)

Leakage Power =
$$1 - |S_{11}|^2 - |S_{12}|^2$$
 (1)

using the simulated values of S_{11} and S_{12} , is shown in Fig. 4(b) versus L_2 , aperture length. It can be seen that radiated power is increased by increasing L_2 , which reveals that antenna efficiency is increased.



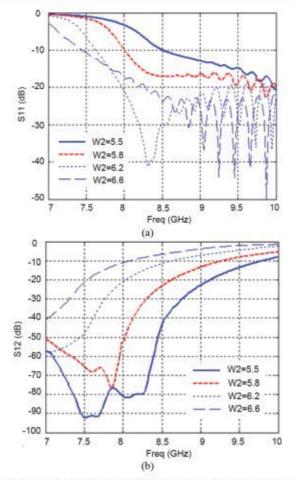


Fig. 3 The effect of W₂ on a) reflection coefficient, b) insertion loss of the proposed antenna versus frequency

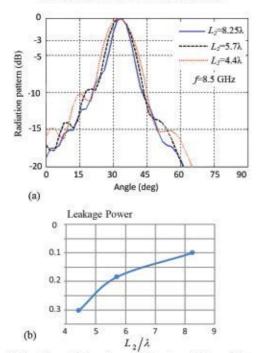


Fig. 4 The effect of L_2 on beamwidth and radiation efficiency, a) simulated H-plane radiation pattern at 8.5 GHz for different values of L_2 , b) simulated leakage power versus normalized L_2

Based on the above discussion, a sample of the proposed LWA with the dimensions listed in Table. I is designed, simulated and its radiation properties are investigated. One model of the designed antenna is also fabricated and its radiation characteristics are measured. The photo of the fabricated antenna is shown in Fig 5. The rear side of antenna is completely metallic. Rogers Duroid 5880 with the relative permittivity of 2.2 and thickness h = 0.5 mm is used as the substrate.

TABLE I. GEOMETRICAL PARAMETERS OF THE PROPOSED ANTENNA

Parameter	Value (mm)	Parameter	Value (mm)	
p	1.6	W_1	7.92	
d	1	W_{T}	6	
d_1	15	L_{T}	13.38	
L_2	291.45	$W_{50}/2$	1.54	
W_2	5.8			

Electric field pattern in HMSIW structure for the proposed antenna is shown in Fig. 6. Also, the mechanism of the waves radiated thorough the dielectric aperture of the LWA is shown in Fig. 6.




Fig. 6 Electric field pattern in HMSIW across the dielectric aperture, a) top view, b) side view.

IV. RESULTS AND DISCUSSION

Measured and simulated S parameters of the proposed antenna are shown in Fig. 7. It can be seen that for measured results, over the frequency range of 8 GHz to 10.47 GHz, both S_{11} and S_{12} are less than -10 dB, and so LWA radiates efficiently. Also the obtained results by measurement agree well with those obtained by simulation.

In Fig. 8 measured and simulated radiation patterns at 8.5 GHz and 9 GHz are illustrated. The patterns are plotted at principal E-, (x-y) and H-planes, (x-z), which shows a very good agreement between simulated and measured results. Moreover, measured



Fig. 5 Photo of the fabricated antenna



radiation patterns at 8.25 GHz, 9 GHz, 9.6 GHz and 10 GHz are shown in Fig. 9. Results show that the antenna beam is steering in an angular region by frequency variation. Radiation patterns at E- and H-plane reveal that the proposed antenna has a half conical 3-dimentional pattern which effectively can radiate in two quarters of free space based on port excitation. For the proposed antenna in [12], the LWA provides a full conical 3-dimentional pattern which effectively can radiate in all four quarters of space based on port excitation.

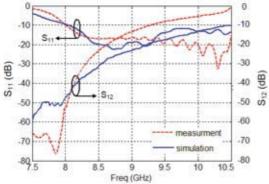


Fig. 7 S parameters of the proposed antenna

It can also be observed that by increasing frequency, narrower beam and consequently higher gain is provided, which is caused by enlargement of dielectric aperture length L_2 due to the frequency change. Front to back ratio (FTBR) in H-plane is also

improved by frequency enhancement. The detailed results are summarized in Table II.

The effect of dielectric aperture width d_1 on antenna radiation performance including bandwidth at which the effective leakage is occurred, gain and FTBR are also listed in Table II. The case d_1 =0 refers to the LWA structure proposed in [12]. Results in Table II show that for the proposed antenna in this paper, impedance bandwidth, gain and the steering angular sector are enhanced. Also, radiation pattern of the presented antenna in [12] is conical while for the proposed LWA in this paper radiation pattern has a half conical shape.

V. RADIATION PATTERN CALCULATION

In the proposed HMSIW structure, the dominant TE₁₀ mode is propagating. However, due to the leakage of power, propagation is occurred with attenuation. On the other hand, as illustrated in in Fig. 6, electric field distribution over the dielectric aperture is generated by propagating field inside the waveguide. Thus, filed distribution across the dielectric aperture is similar to the filed distribution related to attenuating TE₁₀ mode. In fact, the proposed antenna can be considered as an aperture antenna that an attenuating TE₁₀ mode is distributed on its aperture. Consequently, radiated far fields of the antenna can be calculated by Fourier transform of the aperture field.

Based on the above discussion, field distribution across the dielectric aperture can be considered by equation (2).

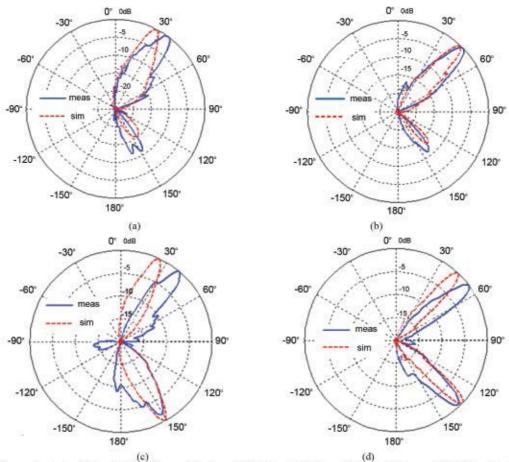
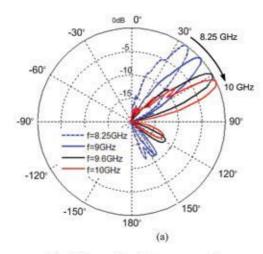


Fig. 8 Measured and simulated radiation patterns: a) H-plane at 8.25 GHz, b) H-plane at 9 GHz, c) E-plane at 8.25 GHz, d)E-plane at 9



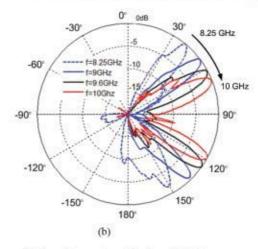


Fig. 9 Measured radiation patterns of the proposed antenna at different frequencies a) H-plane, b) E-plane

TABLE I. THE EFFECT OF DIELECTRIC APERTURE WIDTH ON THE RADIATION PERFORMANCE OF THE PROPOSED ANTENNA

d ₁ (mm)	Bandwidth (GHz)	Fractional bandwidth	Gain (dBi)	Angular coverage	FTBR (dB)
0 ([12])	8.39~9.07	7.8%	9.1~12.35	20°	0
6	7.97~9.23	14.7%	12.4~16	30°	7.6 - 7.8
10	8-9.34	15.4%	12.66-16.34	30°	9.2 - 10.3
15	8-9.26	14.6%	13.28~16.32	30°	11.7 12.8

$$E_a = E_o \cos(\beta_x x') e^{-\alpha_x x'}$$
 (2)

over the aperture

$$0 \le x' \le L_2$$
, $-h/2 \le y' \le h/2$ (3)

where α_x and β_x are attenuation and propagation constants which can be determined by simulation. The variations of normalized α_x and β_x vs frequency, for the proposed HMSIW structure are shown in Fig. 10, which are obtained by a full wave simulation process using HFSS. In this figure k_0 is the wave-number in free space. Considering the equation (2) which describes field distribution across the dielectric aperture and the developed formulations in [13] can be used to calculate far fields and radiation patterns of the proposed antenna. In Fig. 11, the calculated radiation patterns at 8 GHz, 8.5 GHz and 9.2 GHz are illustrated and compared with those obtained by simulation process. Good agreement between calculated and simulated results is observed which proves the validity of the theory used for the calculation of patterns.

VI. CONCLUSION

In this paper, a leaky wave antenna is proposed using HMSIW technique. The main idea is similar to that presented in [12] but adding an undergrounded dielectric aperture to the proposed structure results in gain and bandwidth enhancement. In addition, the angular region in which the antenna beam steers is also enhanced. A sample antenna is designed, simulated and its radiation characteristics are investigated. The designed antenna is also fabricated using a single layer of printed circuit board (PCB) and its radiation characteristics are measured. Results show that the proposed antenna has the advantages of wide band width, high gain, low fabrication cost and low weight in addition to its common features such as and beam steering capability. high directivity

Moreover, the theory for the calculation of radiation pattern for the proposed antenna is presented. In this theory, antenna is considered as an aperture antenna that an attenuated field is distributed across its aperture. Then by Fourier transform of the aperture field, the far fields and radiation patterns are calculated. Good agreement between simulated and calculated results proves the validity of presented theory.

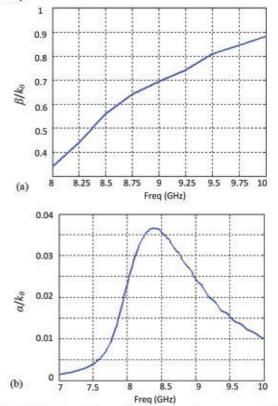
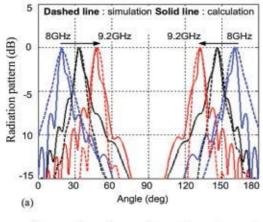


Fig. 10 Variation of normalized propagation constants of the HMSIW structure versus frequency a) phase constant, b) attenuation constant





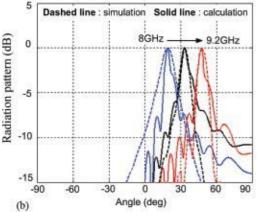


Fig. 11 Comparison of calculated and simulated radiation patterns: a) E-plane, b) H-plane

REFERENCES

- W. Menzel, "A new travelling wave antenna in microstrip," *Arch. Elektron. Uebertrag. Tech.*, vol. 33, no. 4, pp. 137–140, Apr. 1979.
- [2] A. A. Oliner, "Leakage from higher modes on microstrip line with application to antennas," *Radio Sci.*, vol. 22, pp. 907– 912, Nov. 1987.
- [3] G. Zelinski, G. Thiele, M. Hastriter, M. Havrilla, and A. Terzuoli, "Half width leaky wave antennas," *IET Microw. Antennas Propag.*, vol. 1, no. 2, pp. 341 –348, Apr. 2007.
- [4] P. Baccarelli, P. Burghignoli, G. Lovat, and S. Paulotto, "A novel printed leaky-wave 'bull-eye' antenna with suppressed surface-wave excitation," in Proc. IEEE Antennas Propag. Soc. Int. Symp., Jun. 2004, vol. 1, pp. 1078–1081.
- [5] W. Hong, "Development of microwave antennas, components and subsystems based on SIW technology," IEEE international symp. Microwave. Antenna. Propagation and EMC Tech, Mape., pp. 14-17, 2005.
- [6] D. Deslandes and K.Wu, "Substrate integrated waveguide leaky-wave antenna: Concept and design considerations," in Proc. Asia–pacific Microw. Conf., Dec. 2005, pp. 346–349.
- [7] Y. J. Cheng, W. Hong, K.Wu, and Y. Fan, "Millimeter-wave substrate integrated waveguide long slot leaky-wave antennas and two-dimensional multibeam applications," IEEE Trans. Antennas Propag., vol. 59, no. 1, pp. 40–47, Jan. 2011.
- [8] Y. Dong and T. Itoh, "Composite right/left-handed substrate integrated waveguide leaky-wave antennas," in Proc. Eur. Microw. Conf., Rome, Italy, Sep. 2009, pp. 276–279.
- [9] Y. Dong and T. Itoh, "Composite right/left-handed substrate integrated waveguide and half mode substrate integrated waveguide leaky-wave structures," IEEE Trans. Antennas Propag., vol. 59, no. 3, pp. 767–775, Mar. 2011.
- [10] Y. Cheng, W. Hong, and K.Wu, "Millimeter-wave half mode substrate integrated waveguide frequency scanning antenna with quadri-polarization," IEEE Trans. Antennas Propag., vol. 58, no. 6, pp. 1848–1855, Jun. 2010.

- [11] J. Liu, D. R. Jackson and Y. Long, "Substrate Integrated Waveguide (SIW) Leaky-Wave Antenna With Transverse Slots," IEEE Trans. Antennas Propag., vol. 60, no. 1, pp. 20– 29, Jan. 2012.
- [12] J. Xu, W. Hong, H. Tang, Z. Kuai, and K. Wu, "Half-mode substrate integrated waveguide (HMSIW) leaky-wave antenna for millimeterwave applications," IEEE Antenna Wireless Propag. Lett., vol. 7, pp. 85–88, 2008.
- [13] C. A. Balanis, Advanced engineering electromagnetic, John Wiley & Sons, USA, 1989.



Seyed Ali Razavi was born in Kerman, Iran, 1985. He received the B.Sc. degree in electrical engineering from the University of Shahid Bahonar, Kerman, Iran, in 2006, the M.Sc. degree in electrical engineering from Ferdowsi University of Mashhad, Iran, in 2009 and the Ph.D. degree in

electrical engineering from Ferdowsi University of Mashhad, Iran in 2013. He is now with University of Advanced Technology, Kerman, Iran as assistant professor. He has also collaboration with antenna group in Chalmers University of Technology, Sweden as a researcher. He is interested in microwave and millimeter-wave passive devices, antennas, electromagnetic wave scattering, SIW and gap-waveguide technologies.



Mohammad H. Neshati was born in Yazd, Iran. He received his B.Sc. in Electrical Engineering from Isfahan University of Technology, Isfahan, Iran, the M.Sc. degree from Amir-Kabir University of Technology, Tehran, Iran and the Ph.D. degree from University of Manchester (UMIST), England.

He was with Sistan and Baluchistan University, Zahedan, Iran from 1988 to 2006. Since 2006 he has been with the Department of Electrical Engineering of Ferdowsi University of Mashhad, Iran where he is Associate Professor.Dr Neshati is a member of IEEE Antennas and Propagation Society (AS-P) and Microwave Theory and Techniques Society (MTT-S). His current research works include electromagnetics, antenna theory & design, and microwave active and passive circuit design.

